

FERRI[®]

Boom mowers for agriculture
and green areas light green
maintenance

T250A



T320A



T250A

T320A

The new serie of hydraulic flail mowers T250A, T320A and T320A/R for reversible drive, is the result of a deep restyling that has improved functionality and performance.

These new models are particularly suitable as entry-level range for

the market dedicated to farms of medium size and to maintenance of green spaces.

These small size and compact models are particularly suitable for small tractors.

T320A/R

Suitable for tractors with reversible drive.



Boom mowers for agriculture and green areas light green maintenance



The polypropylene oil tank is separated from the frame and allows it to be isolated from any structural stress. Fully recyclable.


Developed and tested in collaboration with:



Drop forged parts for arm linkages.



Circular section of the arms High Torsion Resistance.

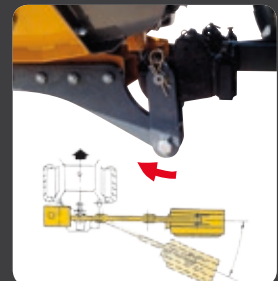

Mechanical breakaway.

FERRI®



T250A
T320A
T320A/R

OPTIONAL



Classic, cable controls.



Electra, monolever electric controls.



Electra Full, monolever electric control with rotor's electric switch.



Oil cooler with thermostat.

IMPLEMENTS



Cutter bar.

Boom mowers for agriculture and green areas light green maintenance

T250A T320A

Technical data		T250A	T320A	T320A/R
Flailhead		NEW TME60	TME80	TME80
Max horizontal reach*	ft	8'3"	10'7"	10'7"
3 Points linkage	Cat.	I - II	I - II	I - II
Weight with Flailhead	lbs	749	816	816
Oil	gal	15,8	15,8	15,8
P.t.o.	MAX Rpm	540	540	540


*Reach measured from tractor centre line to head edge.

Flailhead		NEW TME60	TME80
Width of cut	in	24"	31"
Rotor speed	Rpm	3.200	3.200
Blade tip speed	ft/sec	167'	167'
Flail head angle		190°	190°
Weight	lbs	154	176
Power available to the rotor	HP	20	20
Power max to hydraulic motor	HP	29	29



Direct Drive


Working positions (ft)			
Mod.		T250A	T320A
Flailhead		NEW TME60	TME80
A	ft	8'3"	10'7"
B	ft	3'8"	6'11"
C	ft	3'7"	2'11"
D	ft	5'8"	6'2"
E	ft	9'4"	11'11"
F	ft	3'5"	3'4"
G	ft	4'7"	5'5"
H	ft	6'8"	9'1"
I	ft	3'7"	3'7"
M	ft	2'0"	2'0"
N	ft	0'11"	0'11"

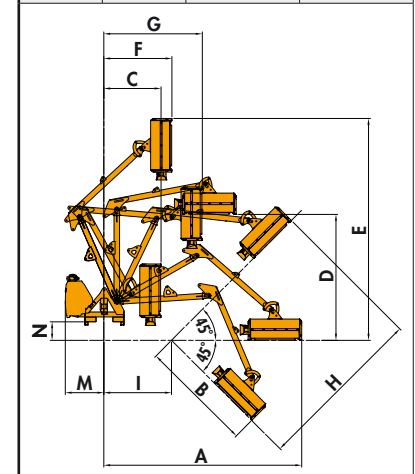

Tractor								
HP/PS		20	25	30	35	40	Min. Tractor weight	Min. Tractor width
T250A							1543 lbs	3'3" ft
T320A							1984 lbs	3'11" ft
T320A/R							1984 lbs	3'11" ft

Flails	Flailhead	NEW TME60	TME80	
Articulated Y blades for: grass, shrubs, bushes, sticks, wood.		Ø max 3/4"	n° 32	n° 40

Transport dimensions (ft)			
Mod.		T250A	T320A
Flailhead		NEW TME60	TME80
A	ft	4'10"	4'11"
B	ft	2'3"	2'3"
C	ft	5'1"	6'4"



All data subject to change
cambelladv.com 44516
T250A-T320A - USA - EN Rev.0 - 1000



FERRI srl
Via Govoni, 30
44034 Tamara (FE) Italy
Tel. +39 0532 866866
Fax +39 0532 866851
info@ferrisrl.it - www.ferrisrl.it



North America Sales and Marketing Manager / FERRI
Ronald E. Roglis - Glenarm, Illinois 62536
Cell (314) 422-9460 - Fax (217) 483-4123
ron.roglis@gmail.com

Parts Stock / FERRI:
J.S. Woodhouse Co., Inc. - 1314 Union Street
P.O. Box 1169 - West Springfield, Ma. 01090 U.S.A.
tel. 413-736-5462 - fax 413-732-3786
info@jswoodhouse.com

www.ferri-america.com