

FERRI®

SIMPLY. THE MOWER

T350S




**Hydraulic
reach mower**

- Ideal for working in confined spaces and for the horizontal and vertical cutting of hedges.
- Extremely versatile, it can work on the right or on the left hand side of the tractor.
- Designed for compact tractors.



T350S DIMENSIONS

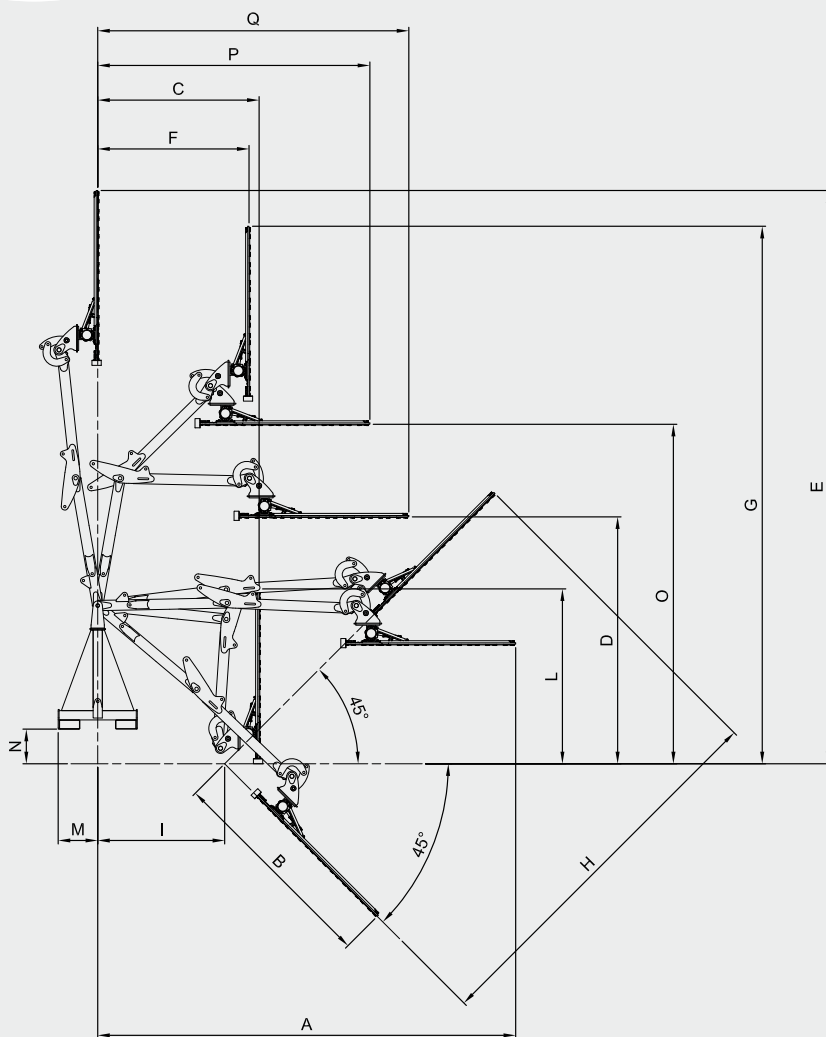

T350S		
A	m (ft)	3,62 (11.87)
B	m (ft)	1,87 (6.13)
C	m (ft)	1,40 (4.59)
D	m (ft)	2,14 (7.02)
E	m (ft)	4,97 (16.30)
F	m (ft)	1,31 (4.29)
G	m (ft)	4,66 (15.28)
H	m (ft)	3,31 (10.86)
I	m (ft)	1,10 (3.60)
L	m (ft)	1,52 (4.98)
M	m (ft)	0,35 (1.14)
N	m (ft)	0,30 (0.98)
O	m (ft)	2,94 (9.64)
P	m (ft)	2,36 (7.74)
Q	m (ft)	2,70 (8.85)

TECHNICAL DATA

Tractor		T350S
Min Tractor power	HP (KW)	15 (11)
Max Tractor power	HP (KW)	50 (50)
Min. Tractor weight	Kg (lbs)	700 (1543)
Min. Tractor width	m (ft)	1,00 (3.28)

CS Standard		CS150 STD
Required oil flow	l/min. (gal/min)	19/22 (5.02/5.94)
Oil recommended load	l/min. (gal/min)	20 (5.28)
Power	HP (KW)	6,40 (4.77)

CS Standard HIGHT FLOW		CS150 HF
Required oil flow	l/min. (gal/min)	30/35 (7.93/9.25)
Oil recommended load	l/min. (gal/min)	32 (8.45)
Power	HP (KW)	10 (7.5)

Pressure	bar (Psi)	140 (2030)
Weight	kg (lb)	230 (507)
Bar length	m (ft)	1,5 (4.92)
Coupling tractor	Cat	I ^a -II ^a



SIMPLY. THE MOWER



The technical data and the models described are not binding. For purposes of improvements the manufacturer reserves the right to any alternation, without notice. Drawings and photographs may refer to optional or particular equipment for other countries. For further information, please contact our sales network.

FERRI Srl - Via Govoni, 30 - 44034 Tamara (FE) Italy - Ph. +39 0532 866866 - Fax +39 0532 866851 - info@ferrisrl.it - www.ferrisrl.it

